




CARVING

ENDLESS

COLLECTION

*Collect Moment
Not Things*

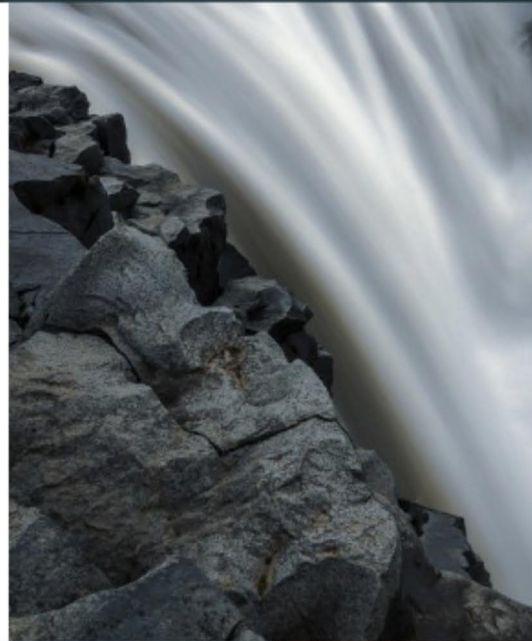

The Call of the Nature

combines the aesthetic qualities of several different stones originating from the south of France, alternating the typical characteristics of sedimentary stone with the more compact look of sandstone to create a unique style and personality. The result is an elegant and original collection, available in textured and honed versions.

WHERE OUR STORY




BEGINNING

range of Ultimate Collection splendid mixture of Art & Craft, available in almost all natural colors and finish that creates a different aura in your life. A Perfect match for your life style and a statement of your personality.



CR E ATLANTA STAVARIO

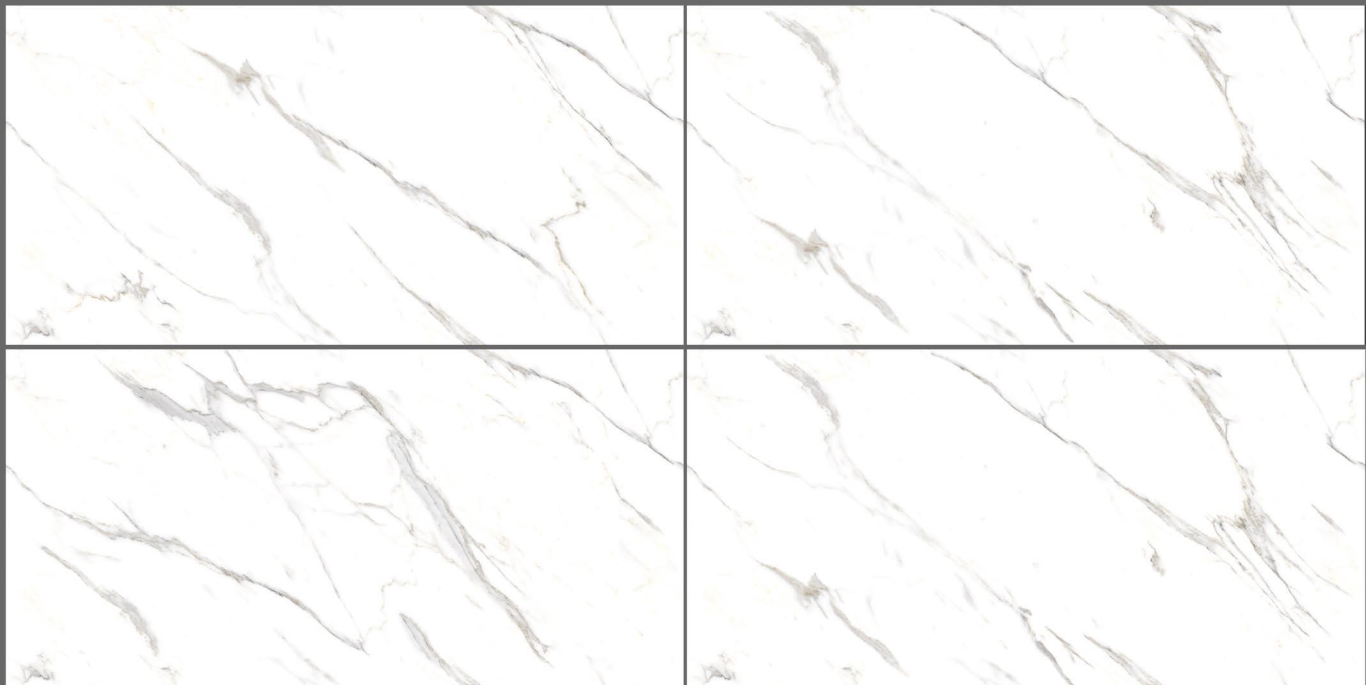

CARVING ENDLESS

SIZE - 600 x
1200 mm



CR E BRECCIA MOCA BEIGE




CARVING ENDLESS

SIZE - 600 x
1200 mm




CR E BRECCIA MOCA GREY

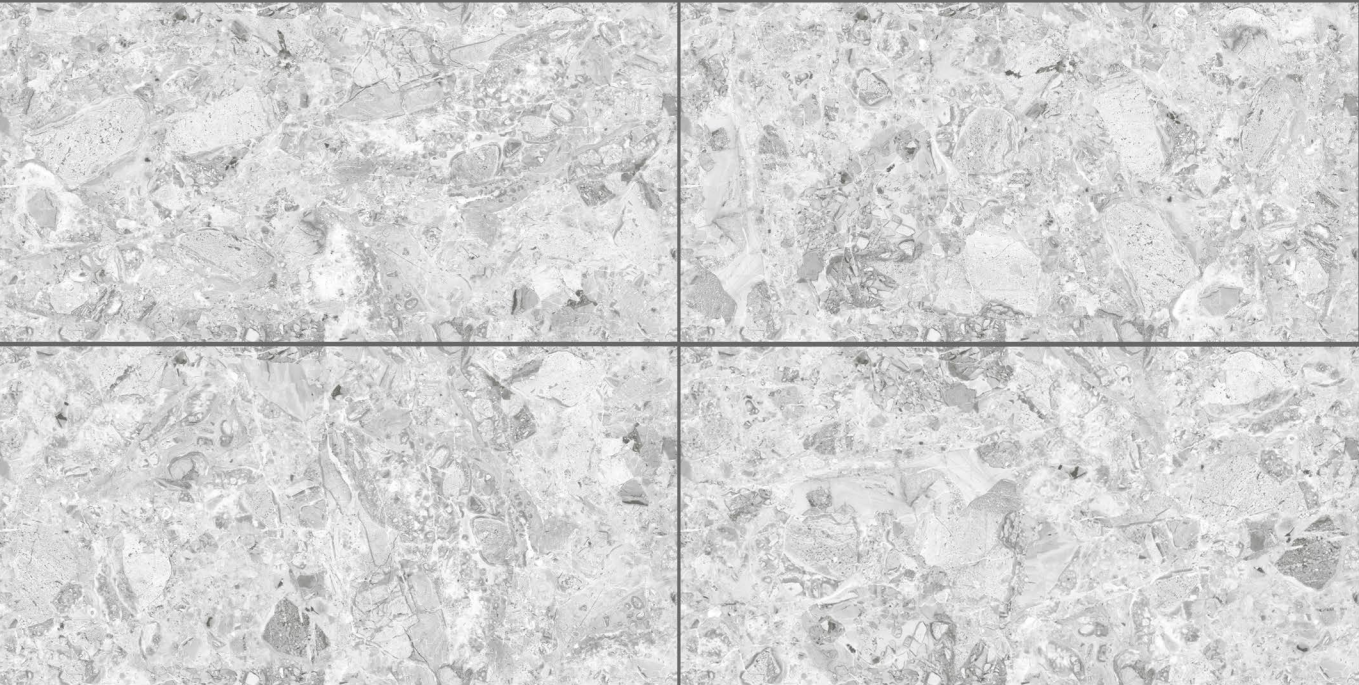


CARVING ENDLESS

SIZE - 600 x
1200 mm

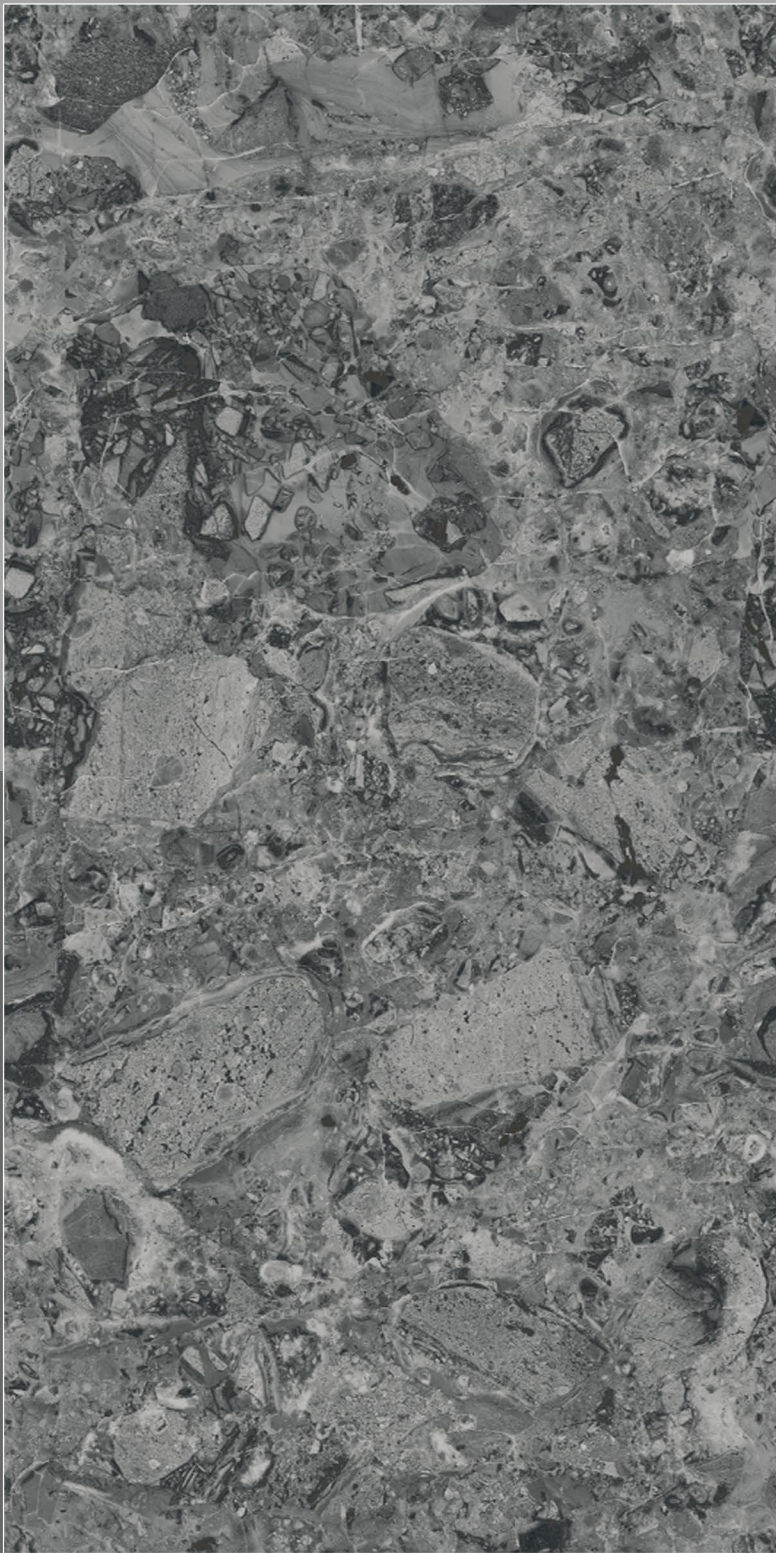


CR E BRECCIA MOKA BLACK

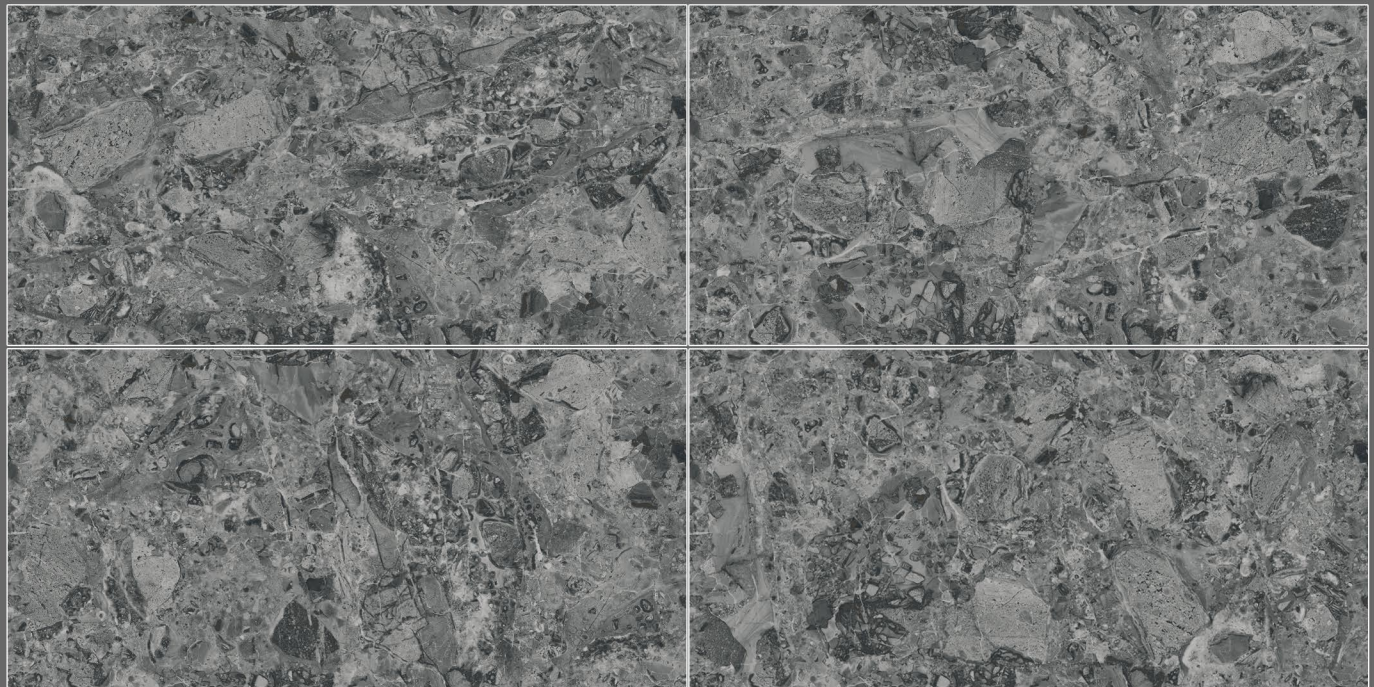


CARVING ENDLESS

SIZE - 600 x
1200 mm

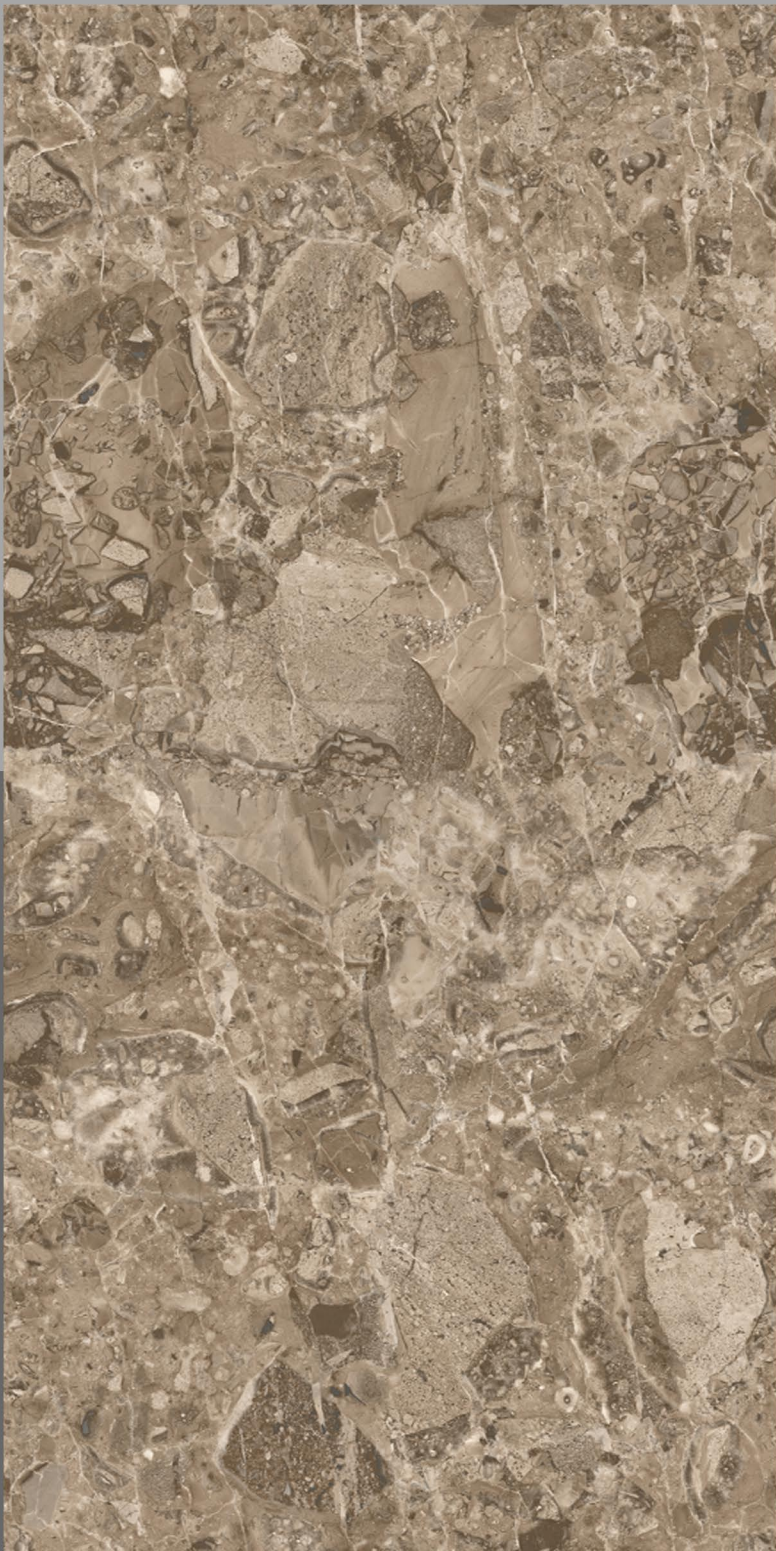

CR E BRECCIA MOKA CHOCO

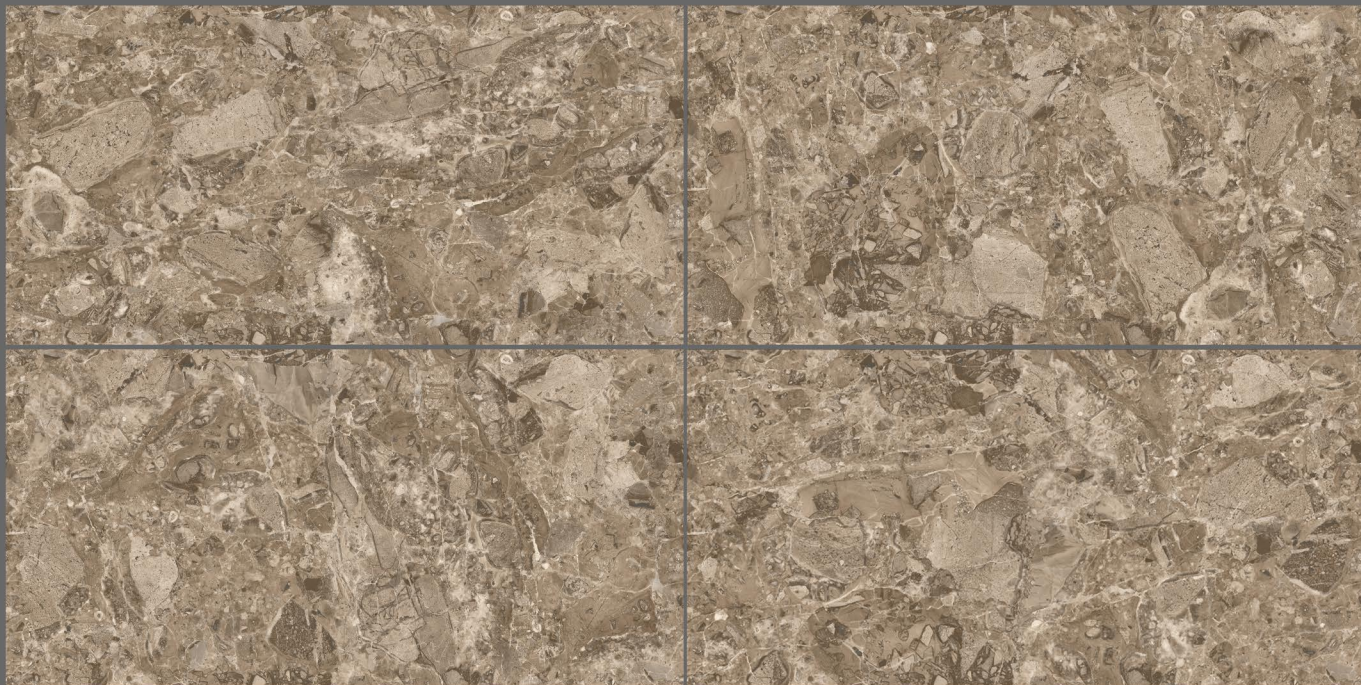

CARVING ENDLESS

SIZE - 600 x
1200 mm



CR E CORTEN BEIGE




CARVING ENDLESS

SIZE - 600 x
1200 mm



CR E CORTEN GREY

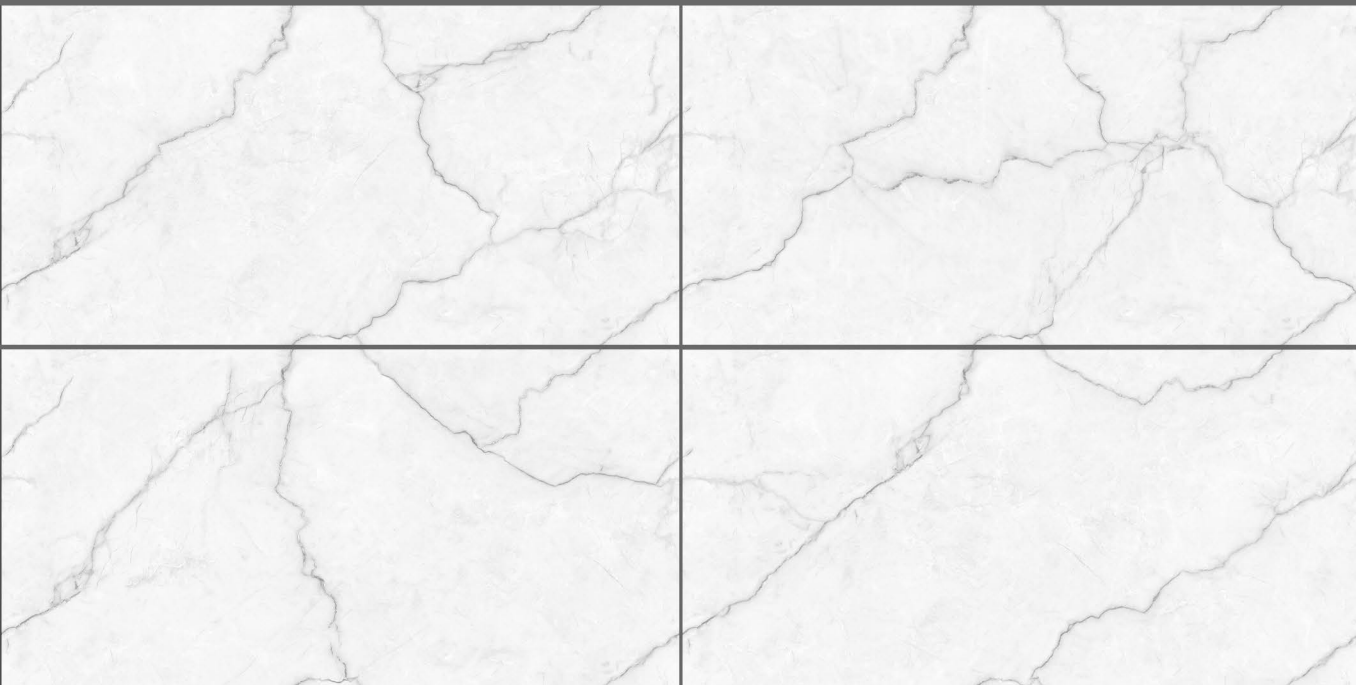

CARVING ENDLESS

SIZE - 600 x
1200 mm



CR E DISERT BRECCIA



CARVING ENDLESS

SIZE - 600 x
1200 mm



CR E EFFCO SATVARIO



CARVING ENDLESS

SIZE - 600 x
1200 mm



CR E LANCY CREMA



CARVING ENDLESS

SIZE - 600 x
1200 mm



CR E LANCY GREY



CARVING ENDLESS

SIZE - 600 x
1200 mm



CR E LUXOR BEIGE



CARVING ENDLESS

SIZE - 600 x
1200 mm



CR E MILTA GREY



CARVING ENDLESS

SIZE - 600 x
1200 mm



CR E MOONLESS SATVARIO



CARVING ENDLESS

SIZE - 600 x 1200 mm



CR E SPRITLITE WHITE



CARVING ENDLESS

SIZE - 600 x
1200 mm

TECHNICAL SPECIFICATION

PACKING DETAILS					
Sr. No	Product	Nominal Size	Thickness	Tiles per Box	Coverage Area
1	VITRIFIED TILES	600x1200mm	8.50mm	2	1.44 Sq. Mtr.

REGULATORY PROPERTIES				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER
STRUCTURAL PROPERTIES				
Water absorption	< 0.50 %	<0.05%	<0.05%	ISO-10545-3
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
Modulus of rupture	Min. 35 N/mm²	Min. 40 N/mm²	Min. 40 N/mm²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
Surface abrasion resistance	As per mfg.	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg.	Min. 4	Min. 5	EN 101
THERMO HYGROMETRIC PROPERTIES				
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁶	Max. 6.5x10 ⁶	Max. 6.5 x 10 ⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15