

# GLOSSY GOLDEN SERIES

**600x600 MM**  
**Porcelain tiles**



WHITE BODY


PORCELAIN TILES

600X600 mm




11058

GOLDEN GLOSSY SERIES

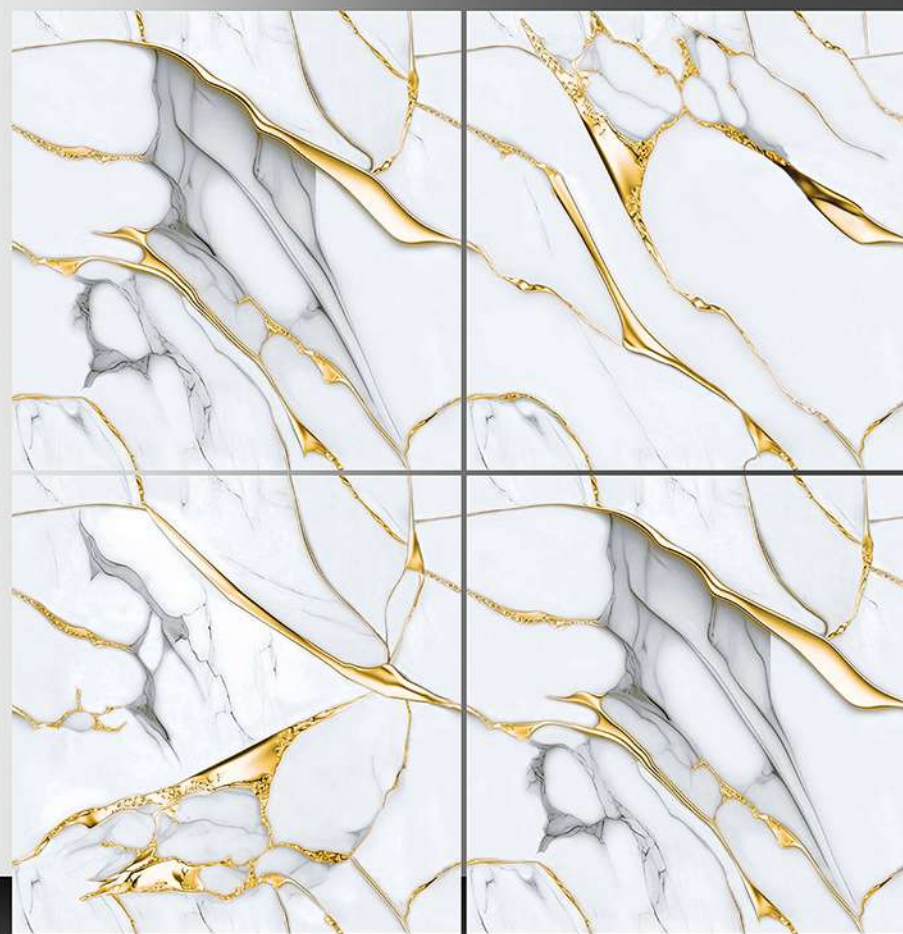

WHITE BODY

PORCELAIN TILES  
600X600 mm

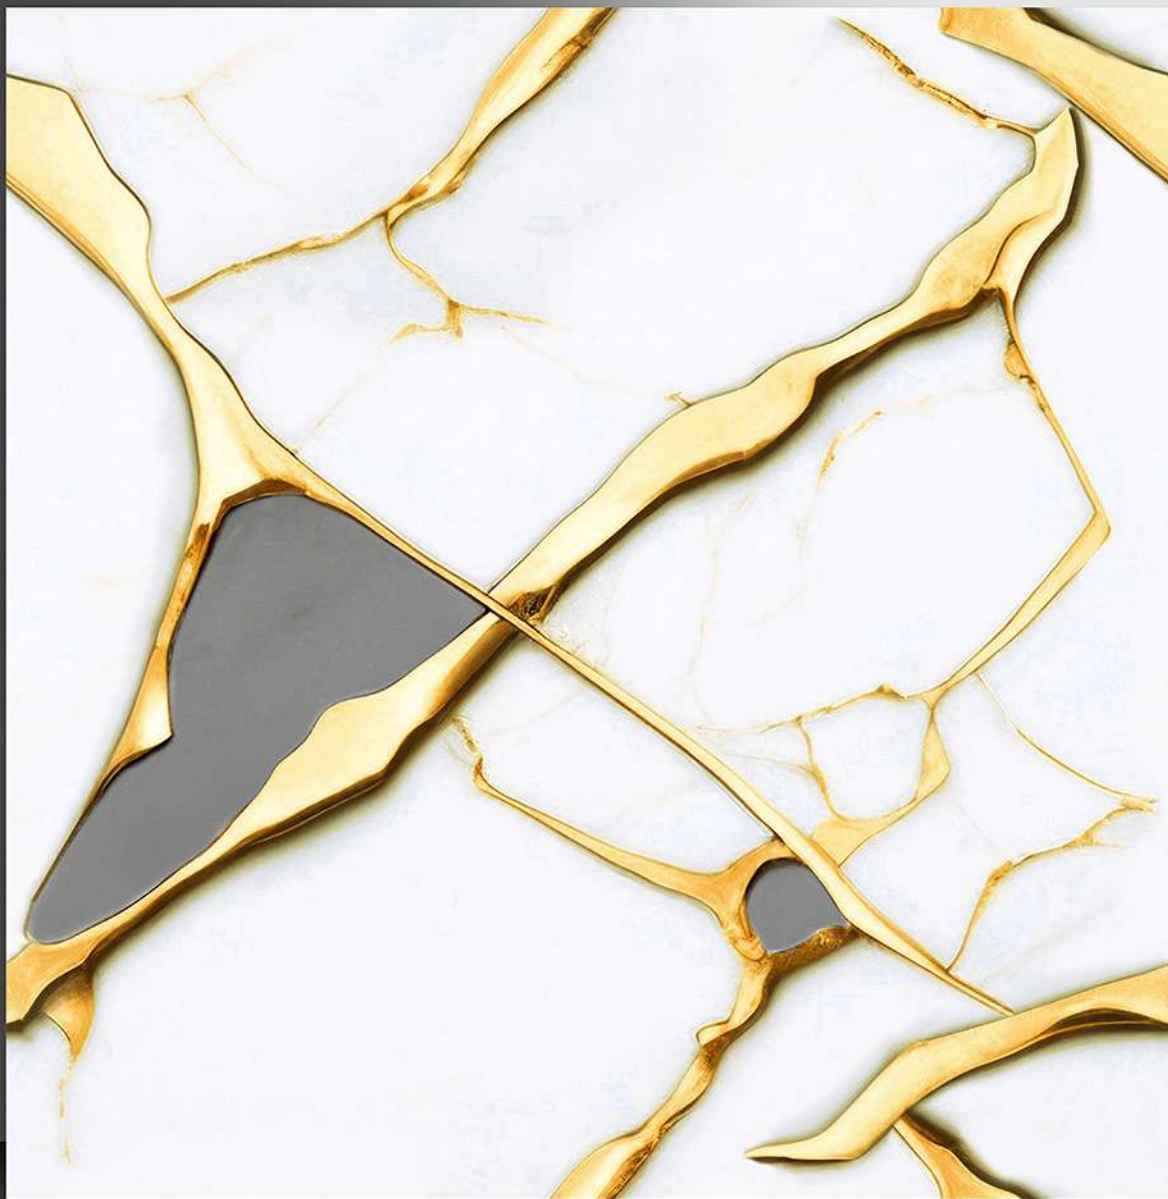

11059

GOLDEN GLOSSY SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



11060

GOLDEN GLOSSY SERIES

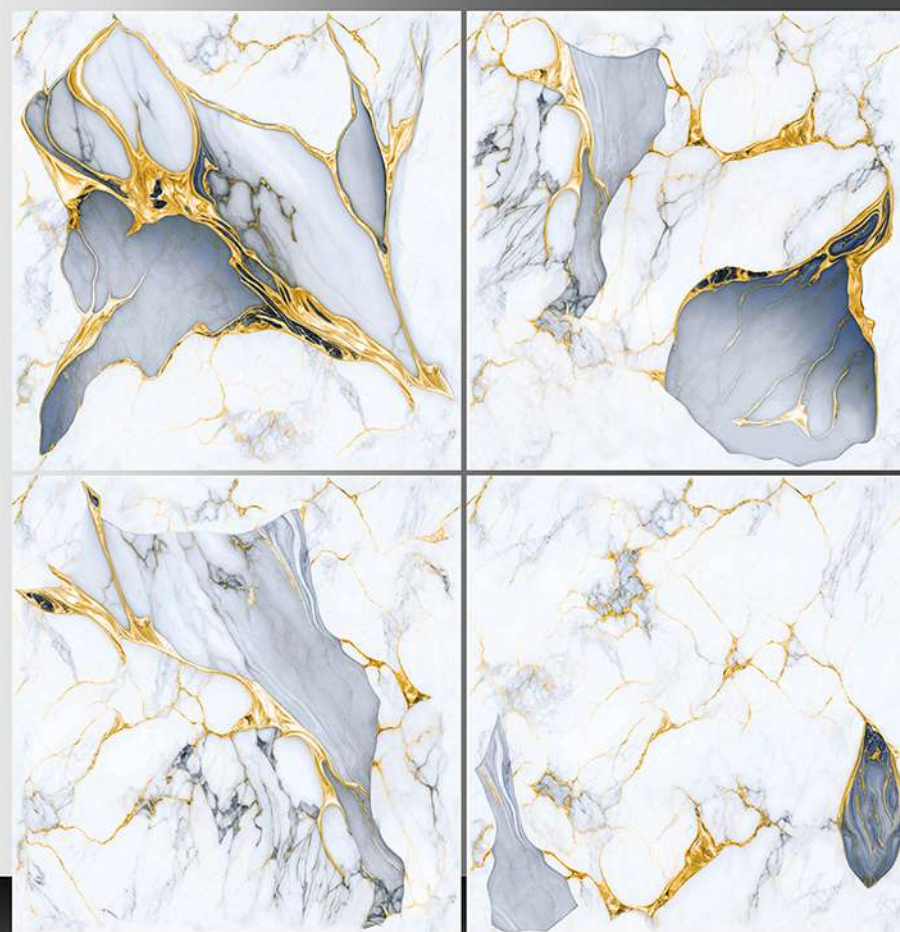

WHITE BODY

PORCELAIN TILES  
600X600 mm



11061

GOLDEN GLOSSY SERIES




WHITE BODY

PORCELAIN TILES  
600X600 mm



11062

GOLDEN GLOSSY SERIES

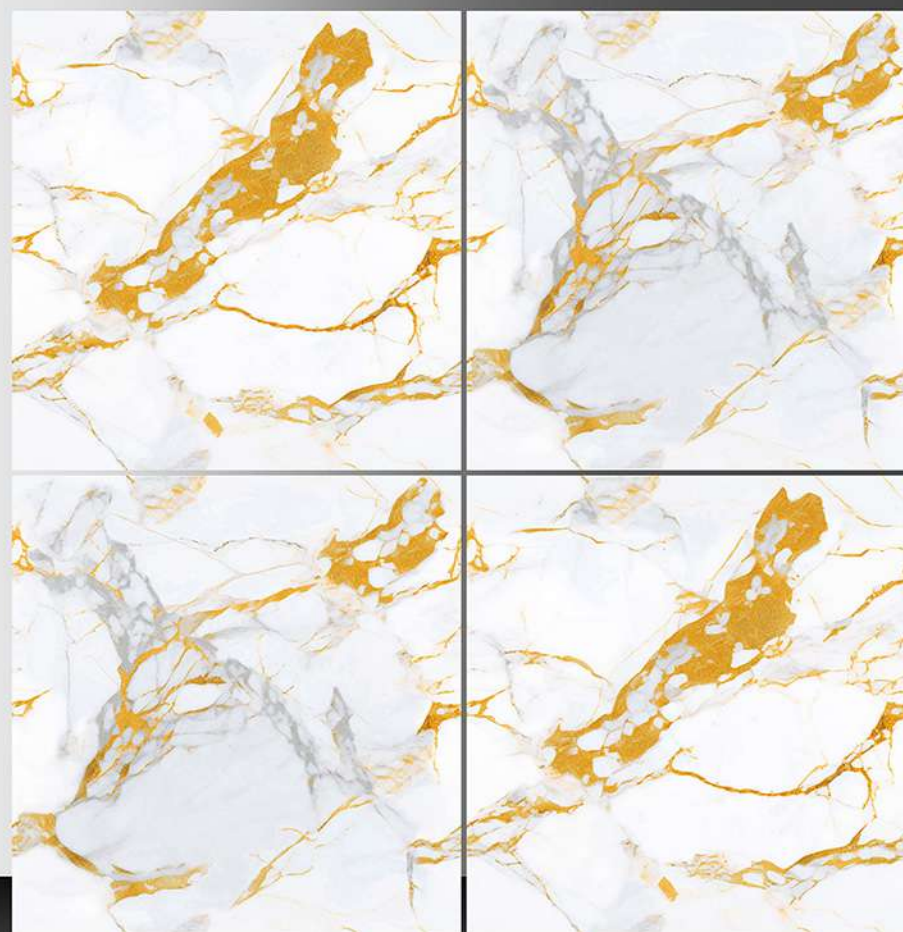

WHITE BODY


PORCELAIN TILES

600X600 mm




11063

GOLDEN GLOSSY SERIES

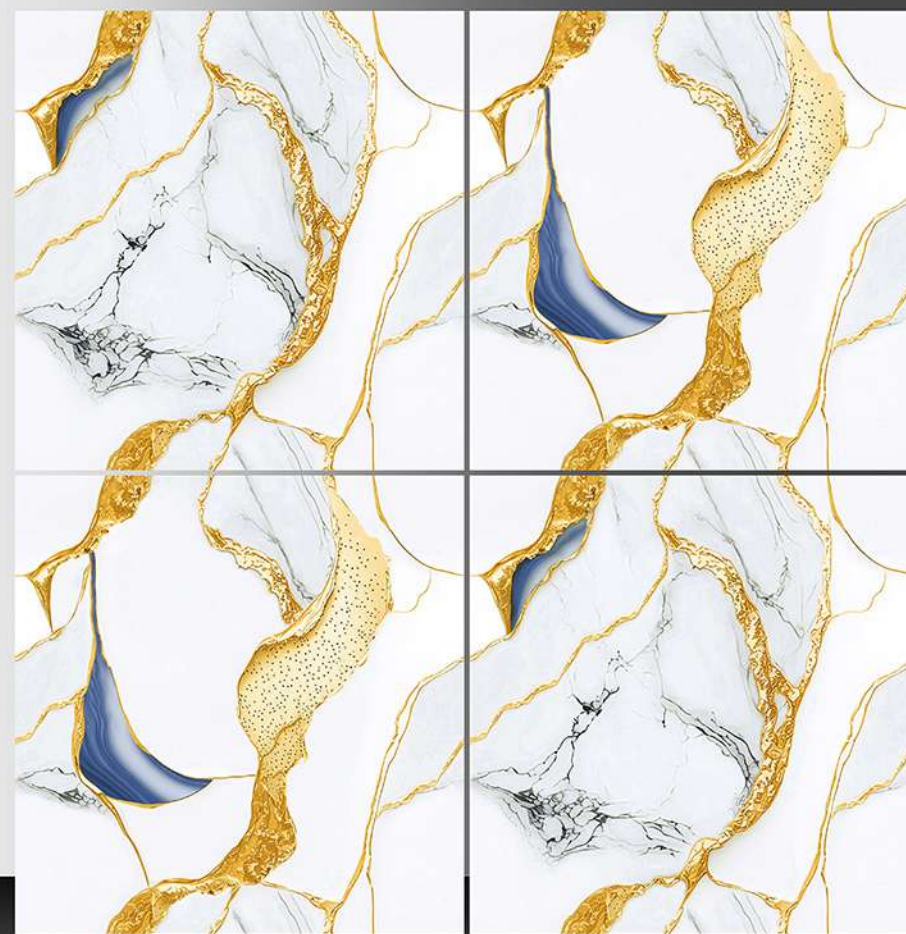


WHITE BODY

PORCELAIN TILES  
600X600 mm

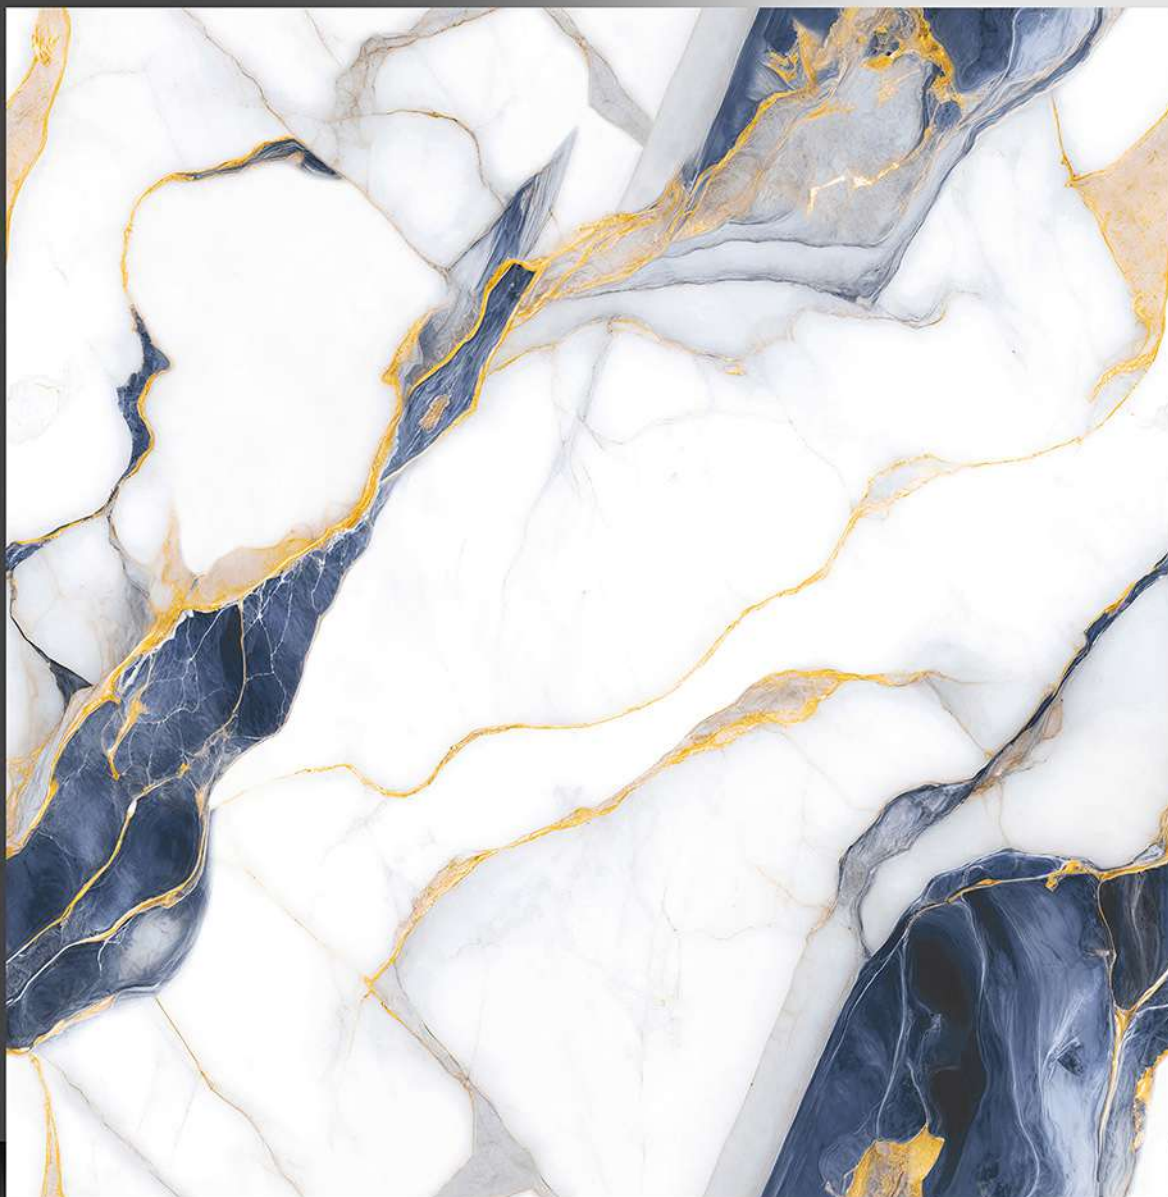

11064

GOLDEN GLOSSY SERIES

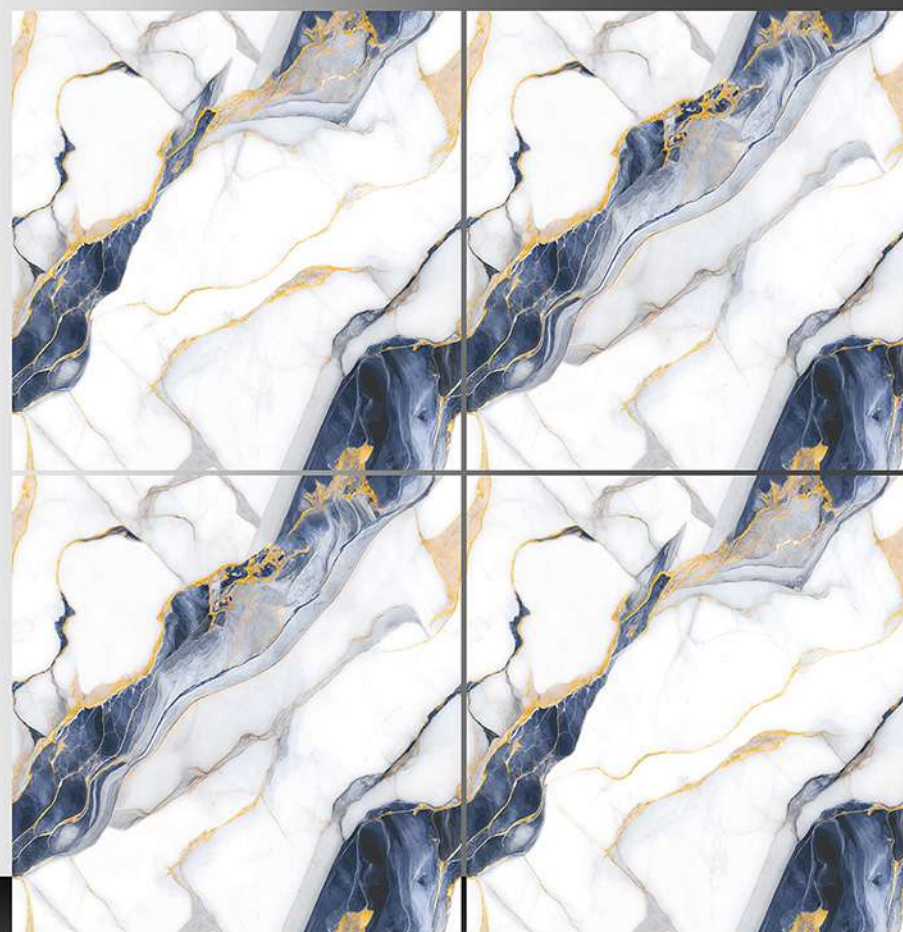

WHITE BODY

PORCELAIN TILES  
600X600 mm



11065

GOLDEN GLOSSY SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



11066

GOLDEN GLOSSY SERIES

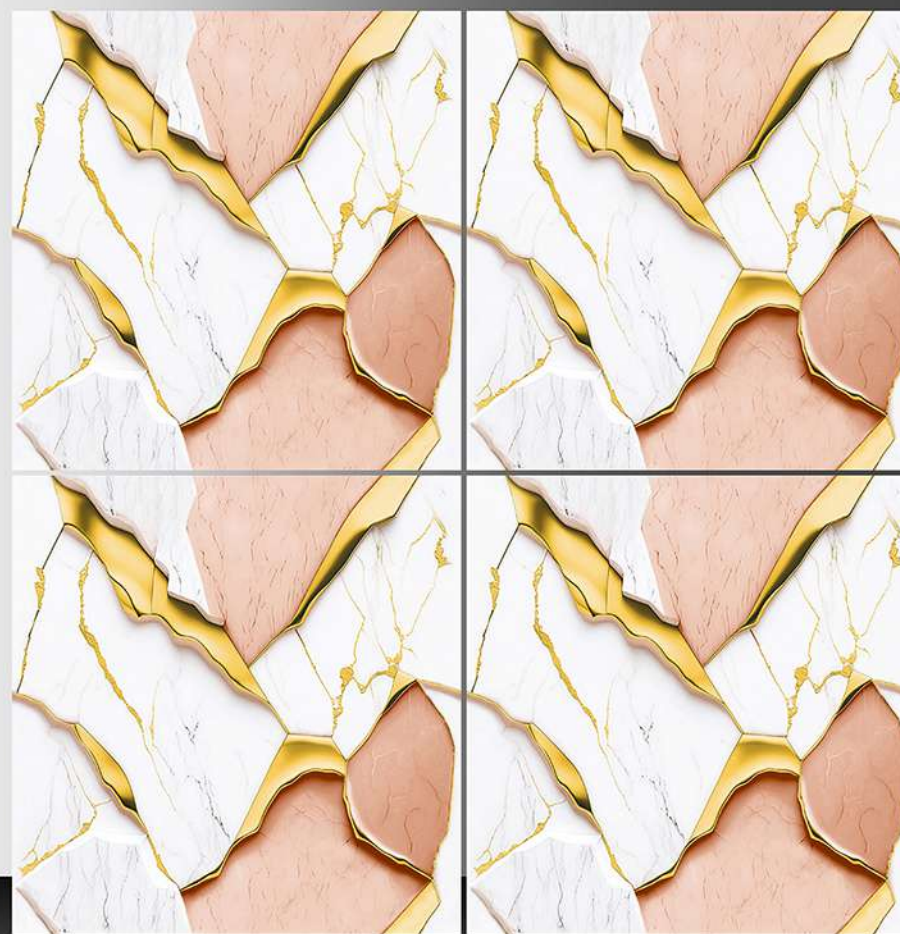

WHITE BODY

PORCELAIN TILES

600X600 mm



11067

GOLDEN GLOSSY SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



11068

GOLDEN GLOSSY SERIES

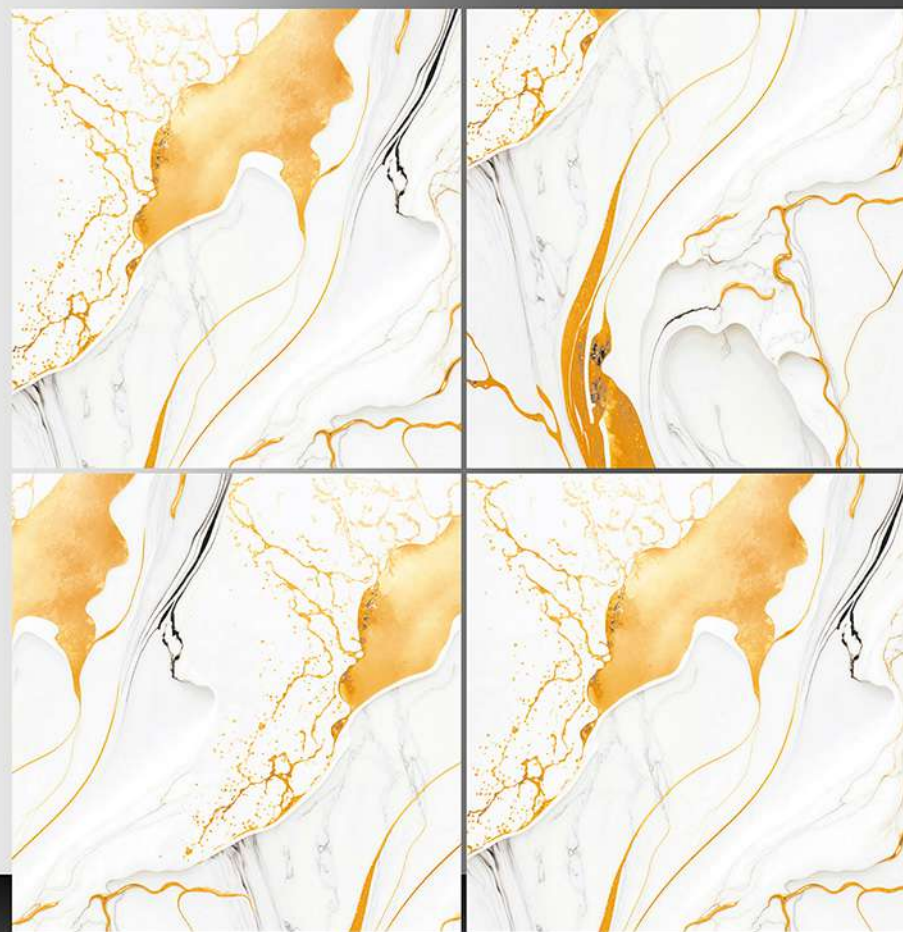

# TECHNICAL SPECIFICATION

| Particulars              | Standard as per ISO 13006/EN 176 | OUR VALUE    | METHOD OF TESTING  |
|--------------------------|----------------------------------|--------------|--------------------|
| Deviation in length      | ± 0.50%                          | ± 0.3%       | EN 98              |
| Deviation in Thickness   | ± 5%                             | ± 3%         | EN 98              |
| Straightness Of Sides    | ± 0.5%                           | ± 0.3%       | EN 98              |
| Rectangularity           | ± 0.6%                           | ± 0.3%       | EN 98              |
| Surface Flatness         | ± 0.5%                           | ± 0.3%       | EN 98              |
| Water Absorption         | < 3                              | 3 < 4        | ISO 10945.3 EN 98  |
| Mohs Hardness            | > 5                              | > 5          | EN 101             |
| Flexural Strength        | > 35 N/Sq.mm                     | > 39 N/Sq.mm | —                  |
| Abrasion Resistance      | As specified by Manufacturer     | PE   3       | ISO 10545.6 EN 102 |
| Frost Resistance         | Frost Proof                      | Frost Proof  | ISO 10534 - 11     |
| Chemical Resistance      | No Damage                        | No Damage    | ISO 10534 - 18     |
| Thermal Shock Resistance | No Damage                        | No Damage    | ISO 10545 - 9      |
| Colour Resistance        | No Damage                        | No Damage    | —                  |
| Stain Resistance         | Resistance                       | Stain Proof  | ISO 10545 - 14     |
| Moisture Expansion       | NIII                             | NIII         | ISO 10545 - 10     |
| Crazing Resistance       | Min 2 Cycle                      | Min 4 Cycle  | —                  |

Note : Colour Shown are as accurate as the limitations of the printing process will allow. Prospective Customer Are advised to inspect a sample of the tiles before ordering every effort has been made to ensure the Accuracy of the information given. However, the Company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing Instruction on the cartons of the tiles as on responsibility can be accepted by the company once the tiles have been fixed.

## PACKING DETAIL

| Size         | Thickness | No. of Tiles | Area Approx.  | Weight Approx. |
|--------------|-----------|--------------|---------------|----------------|
| 600 X 600 MM | 9 MM      | 4 Pcs.       | 1.44 Sq. Mtr. | 25.5 Kg.       |

## UTILITY OF FLOOR TILES


 Airport Terminals


 Discotheques


 Corridors/Halls


 Industries


 Gymnasiums


 Hospitals


 Religious Places


 Hotels


 Offices


 Super Markets


 Schools


 Shopping malls


 Restaurants


 Domestic